

Klinger originally invented the Reflex level gauge and the Group has since developed into a world market leader in liquid level monitoring equipment.

Today TC Klinger manufactures the most comprehensive range of Liquid level gauges suitable for the varied needs of the modern process plant. Used by most major process plant operators, engineering contractors and OEMs throughout the world, we can truly claim world leadership in this field. Our quality systems have been assessed to the requirements of BSEN ISO 9001.

We manufacture two types of shut-off fittings, gauge valves type RAV, rated up to ANSI Class 1500 and gauge cocks type DG rated ANSI Class 900. The RAV shut-off device is a metal seated valve with integral safety ball. Available in a variety of options it is suitable for most process requirements.

The DG gauge cock, with the replacable packing sleeve and quick 90° operation provides an economical alternative for the simpler applications.

## VALVES & COCKS

### RAV Valves ANSI Class 900 and 1500

#### Inside Screwed ANSI 900/1500 (PN160-PN250)


Plain Nipple to Gauge-RAV946

- 946/1 Handwheel operation (ANSI 1500)
- 946/2 Weighted lever (ANSI 900)
- 946/3 Double ended lever (ANSI 900)
- 946/5 Quick closing handwheel (ANSI 900)

Union Nipple to Gauge – RAV947

- 947/1 Handwheel operation (ANSI 1500)
- 947/2 Weighted lever (ANSI 900)
- 947/3 Double ended lever (ANSI 900)
- 947/5 Quick closing handwheel (ANSI 900)

*Approximate Weight 11kg/Set*

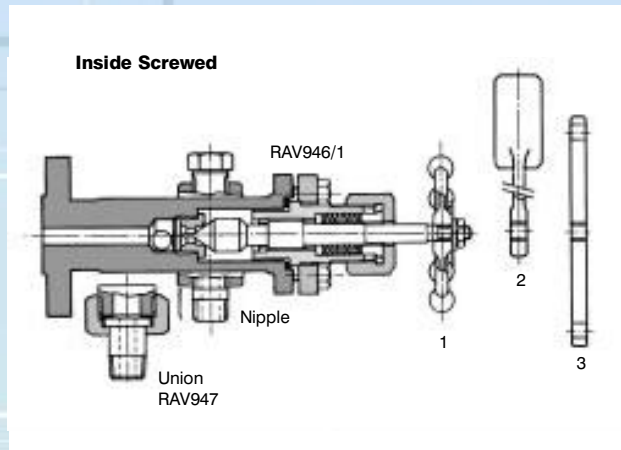

#### Outside Screwed ANSI 900/1500 (PN160-PN250)


Plain Nipple to Gauge-RAV956

- 956/1 Handwheel operation (ANSI 1500)
- 956/2 Weighted lever (ANSI 900)
- 956/3 Double ended lever (ANSI 900)
- 956/5 Quick closing handwheel (ANSI 900)

Union Nipple to Gauge – RAV957

- 957/1 Handwheel operation (ANSI 1500)
- 957/2 Weighted lever (ANSI 900)
- 957/3 Double ended lever (ANSI 900)
- 957/5 Quick closing handwheel (ANSI 900)

*Approximate Weight 11kg/Set*

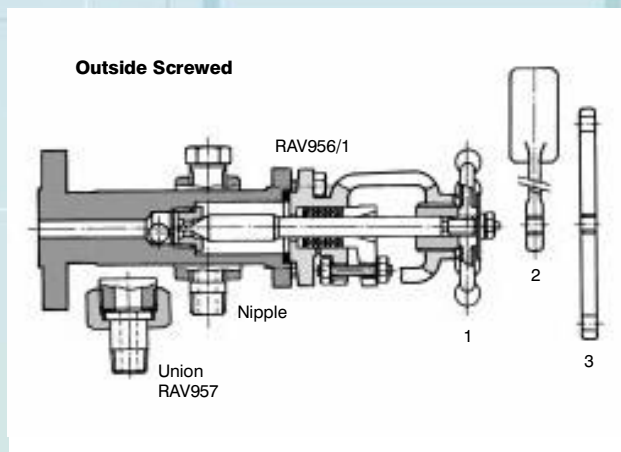

#### DG Gauge Cocks ANSI 900 (PN160)

- Quick 90° lever operation.
- Roddable.
- Replacable packing sleeves (AB 18).
- Ball checks optional.

*Approximate Weight 8kg/Set*

