

# Optoelectronic OEM level switch

## Compact design

### Model OLS-C02, with selectable switch length

TC Fluid Control data sheet LM 31.32

#### Applications

- Machine tools
- Hydraulics
- Plant construction and machine building
- Pump technology
- For liquids, such as oils, water, distilled water, aqueous media

#### Special features

- Selectable switch length from 65 mm to 3,000 mm
- No moving components
- Mounting position as required
- Accuracy  $\pm 0.5$  mm
- Choice of electrical connections: PUR cable, circular connector M12 or angular connector EN 175301-803 A



Optoelectronic OEM level switch, model OLS-C02, with cable outlet

#### Description

The model OLS-C02 optoelectronic OEM level switch is used for monitoring the level of liquids. The optoelectronic sensor consists of an infrared LED and a light receptor.

The light from the LED is directed into a prism which forms the tip of the sensor. So long as the tip is not immersed in liquid, the light is reflected within the prism to the receptor.

When the liquid rises within the vessel and surrounds the tip, the light beam is interrupted by the liquid, so that the reactor is no longer or only weakly reached by the light and reacts to this change by triggering a switching operation.

The model OLS-C02 level switch offers the advantage that its switch length is selectable. This enables an optimal adaptation to the application-specific requirements.

## Specifications

General data	
Measuring accuracy	±0.5 mm
Minimum distance from the glass tip to an opposite surface	≥ 10 mm
Mounting position	as required
Switch length L	Standard lengths: 150, 300, 500, 750, 1,000 and 1,500 mm; other lengths on request  L <sub>min</sub> = 65 mm L <sub>max</sub> = 3,000 mm
Process connection	G 1/2" (male)


Design data	
Responsiveness	preset, please specify the medium
Medium temperature	-30 ... +100 °C
Ambient temperature	-25 ... +70 °C
Operating pressure	0 ... 2.5 MPa (0 ... 25 bar)
Materials	
■ Light guide	Borosilicate glass
■ Case und process connection	Stainless steel 1.4571

Electrical data	
Power supply	DC 12 ... 32 V
Max. current supply	40 mA
Output	PNP transistor, protected against reverse polarity
Electrical connection	
■ PUR cable	Standard lengths: 2 and 5 m Diameter: 3 x 0.25 mm <sup>2</sup> Cable end: cut to length
■ Circular connector	M12
■ Angular connector	per EN 175301-803 A
Switching function	Normally open (closed in medium) or normally closed (open in medium)
Ingress protection	IP 65
Number of switch points	1

## Options

- Other versions on request
- Accessories: Circular connector M8 with cable

## Dimensions in mm

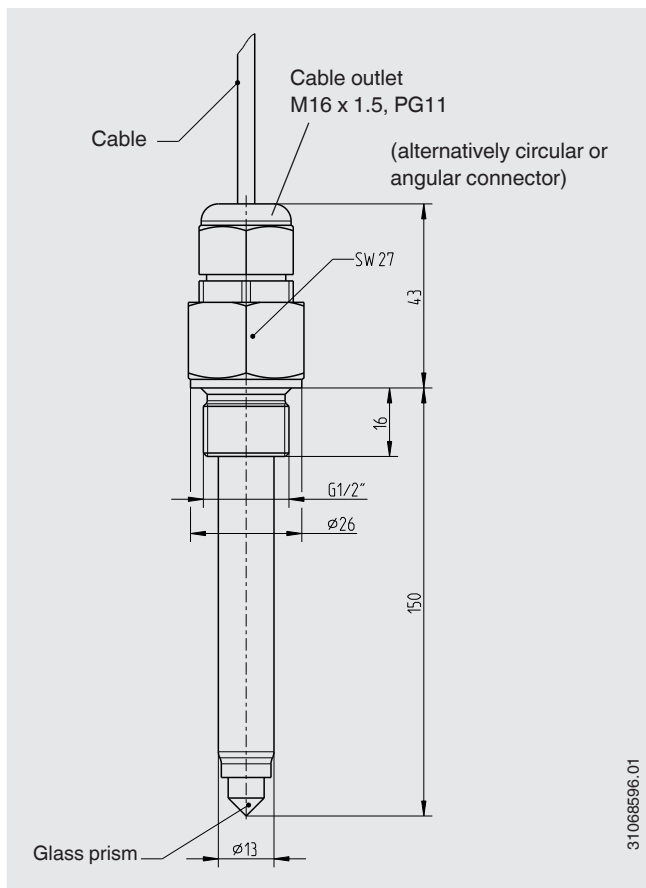

### Ordering information

Model / Process connection / Electrical connection / Switching function / Medium / Switch length / Options

© 2014 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.  
The specifications given in this document represent the state of engineering at the time of publishing.  
We reserve the right to make modifications to the specifications and materials.