


KLINGER SLEEVED PACKED COCKS

Model ABMZ 12 (PN 160)

1- GENERAL


- PN 160
- 1/4", 1/2" BSP
- 1/4", 1/2" NPT
- Material : steel (material code VIII), acid resistant steel (material code X)
- Straight-way cocks with female screwed ends and male screwed ends.
- Female screwed ends and male screwed ends with pipe thread to BSP or NPT thread to ANSI B2.1
- Straight way cock as cylinder cock sealed by elastic packing sleeve which can be retightened.
- Body made of steel or acid resistant steel.
- Cock handle made of GTW 35.
- Cock plug made of stainless and acid resistant special steel.

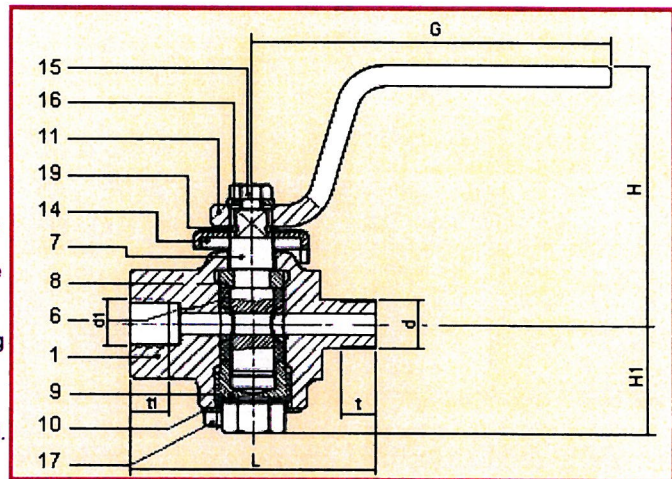

Part	Material code	
	VIII	X
1 Body	Carbon steel	1.4404/1.4571
5 Type plate*	1.4301	1.4301
6 Packing sleeve	KAF	KAF
7 Cock plug	1.4401	1.4401
8 Split ring	1.4401	1.4401
9 Tightening nut	1.4401	1.4401
10 Locking plate	1.4401	1.4401
11 Cock handle	GTW 35 Zn 8-15 cC	GTW 35 Zn 8-15 cC
14 Stop AB 12	1.4401	1.4401
15 Hexagon head screw	A4	A4
16 Washer	A4	A4
17 Fillister head screw	A4	A4
18 Metal tack*)	SS	SS
19 Seeger circlip ring	1.4034	1.4034

*not shown in illustration

2- SUGGESTED ORDER SPECIFICATION ABMZ 12-1/4" NPT / 1/4" BSP VIII, PN 160

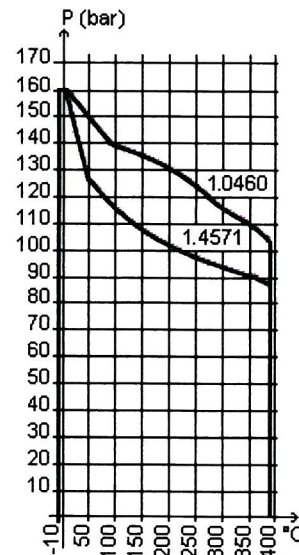

Overall and Connection dimensions in mm

Cock type	Bore mm	Overall dimensions				Connection dimensions				Weight approx.Kg
		H	H1	L	G	d	t	d1	t1	
ABMZ 12 - 1/4" NPT / 1/4" BSP	6	72	31.5	70	100	1/4" NPT	10	1/4" BSP	10.5	0.65
ABMZ 12 1/2" BSP/ 1/2" NPT	6	72	31.5	70	100	1/2" BSP	14	1/2" NPT	13.5	0.65

Further information

For further information, please send an E-mail to the following address: instruments@tc-fluidcontrol.com
 The characteristics of the products described on this page may be modified without notice, in the interests of regular improvement. In addition, the technical data reproduced here is provided for information only.