


KLINGER SLEEVED PACKED COCKS

Model ABS 12 (PN 160)

1- GENERAL

- PN 160
- DN 3/8", 1/2"
- Material : steel (material code VIII), acid resistant steel (material code X)
- **Straight-way cocks with socket weld ends.**
- **Socket weld ends to ANSI B16.11**
- Straight way cock as cylinder cock sealed by elastic packing sleeve which can be retightened.
- Body made of steel or acid resistant steel.
- Cock handle made of GTW 35.
- Cock plug made of stainless and acid resistant special steel.

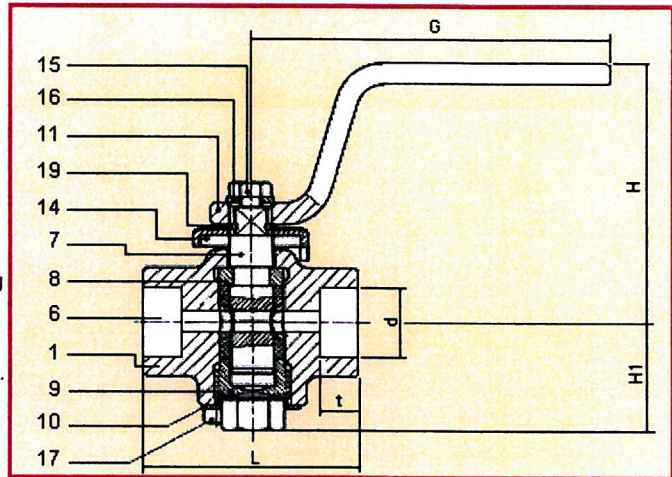


Part	Material code	
	VIII	X
1 Body	Carbon steel	1.4404/1.4571
5 Type plate*	1.4301	1.4301
6 Packing sleeve	KAF	KAF
7 Cock plug	1.4401	1.4401
8 Split ring	1.4401	1.4401
9 Tightening nut	1.4401	1.4401
10 Locking plate	1.4401	1.4401
11 Cock handle	GTW 35 Zn 8-15 cC	GTW 35 Zn 8-15 cC
14 Stop AB 12	1.4401	1.4401
15 Hexagon head screw	A4	A4
16 Washer	A4	A4
17 Fillister head screw	A4	A4
18 Metal tack*)	SS	SS
19 Seeger circlip ring	1.4034	1.4034

*not shown in illustration

2- SUGGESTED ORDER SPECIFICATION

ABS 12 - 3/8" VIII, PN160

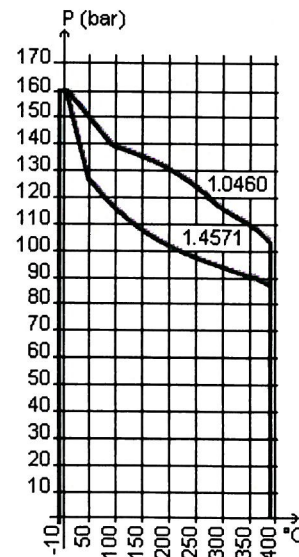

Cock type	Bore mm	Overall dimensions				Connection dimensions		Weight approx.Kg
		H	H1	L	G	d	t	
		mm	mm	mm	mm	mm	mm	
ABS 12 - 3/8"	6	72	31.5	60	100	17.6	10	0.5
ABS 12 - 1/2"	6	72	31.5	70	100	21.8	11	0.5

Further information

For further information, please send an E-mail to the following address: instruments@tc-fluidcontrol.com
 The characteristics of the products described on this page may be modified without notice, in the interests of regular improvement. In addition, the technical data reproduced here is provided for information only.