


## KLINGER PRESSURE GAUGE COCKS

### Model MABI 12 (PN 160)


#### 1- GENERAL

- PN 160
- DN 1/2"
- Material : steel (material code VIII), acid resistant steel (material code X)
- Two-way pressure gauge shut-off cock with female screwed ends and male screwed ends.
- Female screwed ends and male screwed ends with pipe thread to BSP .
- Two-way pressure gauge shut-off cock as cylinder cock sealed by elastic packing sleeve which can be retightened.
- Body made of steel or acid resistant steel.
- Cock handle made of GTW 35.
- Cock plug made of stainless and acid resistant special steel.

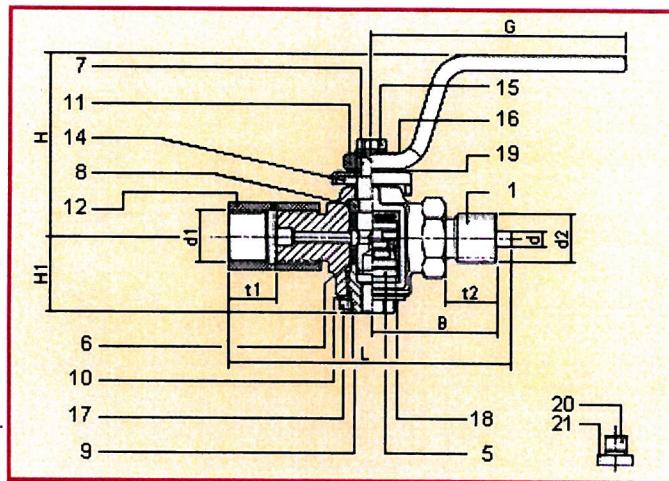

Part	Material code	
	VIII	X
1 Body	Carbon steel	1.4404/1.4571
5 Type plate	1.4301	1.4301
6 Packing sleeve	KAF	KAF
7 Cock plug	1.4401	1.4401
8 Split ring	1.4401	1.4401
9 Tightening nut	1.4401	1.4401
10 Locking plate	1.4401	1.4401
11 Cock handle	GTW 35 Zn 8-15 cC	GTW 35 Zn 8-15 cC
12 Tightening screw	9SMn28K FeNi5p	9SMn28K FeNi5p
14 Stop AB 12	1.4401	1.4401
15 Hexagon head screw	A4	A4
16 Washer	A4	A4
17 Fillister head screw	A4	A4
18 Metal tack	SS	SS
19 Seeger circlip ring	1.4034	1.4034
20 Screw plug	1.4571	1.4571
21 Gasket	Soft nickel	Soft nickel

#### 2- SUGGESTED ORDER SPECIFICATION MABI 12- VIII, PN 160

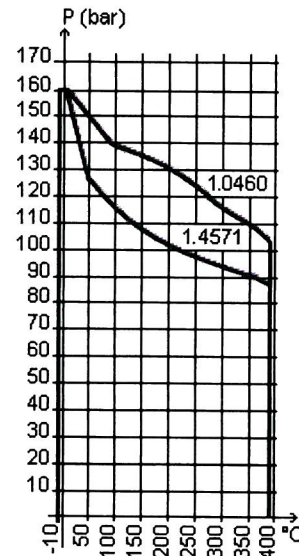

Cock type	Bore mm	Overall dimensions					Connection dimensions					Weight approx.Kg	
		H	H1	L	B	G	d2	t2	d1	t1	d I		
MABI 12	4	72	31.5	106	49	100	1/2" BSP	20	1/2" BSP	19	6	5	0.6

#### Further information

For further information, please send an E-mail to the following address: [instruments@tc-fluidcontrol.com](mailto:instruments@tc-fluidcontrol.com)  
 The characteristics of the products described on this page may be modified without notice, in the interests of regular improvement. In addition, the technical data reproduced here is provided for information only.